


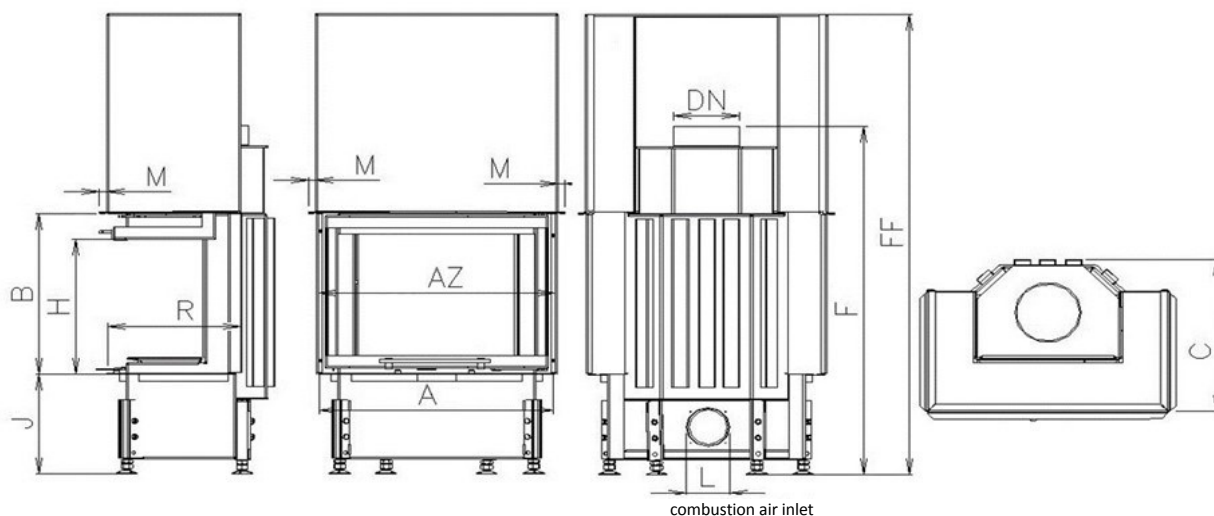

	Sizes		KAZETA 2R90 78 VD 805/450- S/380	KAZETA 2R90 78 VD 805/510- S/380
1	A	mm	790	
2	F	mm	1010	1120
3	C	mm	510	
4	DN	Ø mm	200	
5	B	mm	450	510
6	AZ	mm	805	
7	R	mm	380	
8	FF	mm	1350	1470
9	H	mm	315	375
10	J	mm	325 + /160/	
11	K	Ø mm	2 x 125	
12	L	Ø mm	125	
13	M	mm	20	
14	N	mm		


Basic design:

Segment chamotte lining
Glass Classic
Inox control grip-handle MO1, MP2
Enviromentally friendly varnish
External air inlet

Optional accessories:

Convexional casing (DP)
External ashtray (VOP)
Lower hearth (ZO)
Black segm. chamotte lining (SOČ)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)
Lava basket (KL)
Glass Reflex (SR)
Black printed glass(SM)
Cover frame removable

Technical parameters			
1	Nominal heat output	kW	9
2	Pressure required	Pa	12
3	Average efficiency	%	77,2
4	Average flue gas temperature	°C	239
5	Wood consupcion	kg/h	2,8
6	Consumption of combustion air	m ³ /h	27
7	Emission of CO to 13% O2	%	0,1
8	Flue gas mass flow	g/s	11,5
9	Weight	kg	230
10	Required min. cross section for circulating air - INPUT	cm ²	275
11	Required min. cross section for circulating air - OUTPUT	cm ²	450
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	Character of building const-ruccion with fireplace insert	warm air convection	yes
		heat storage without conv	no

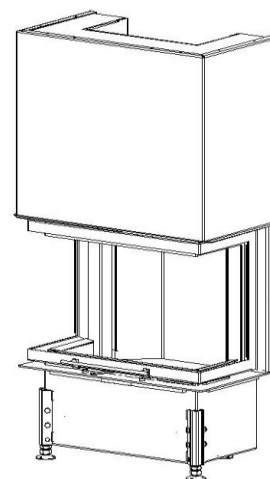

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk